



* 显示器性能不同可能导致
电子样本与实物有差异。




"H": 此编号可提供含涂产品。


"H": Coated products are available with this number.

BRUSSELS


MUSE THERMO PU

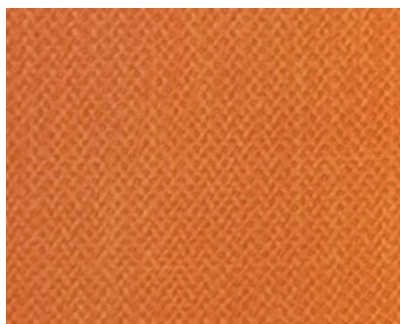


W3E08/H

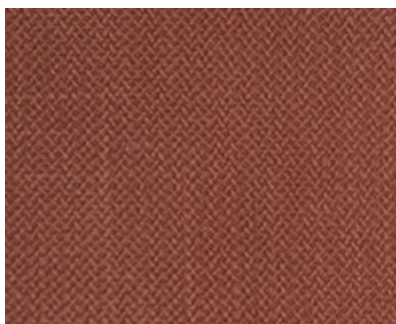

W3E02/H

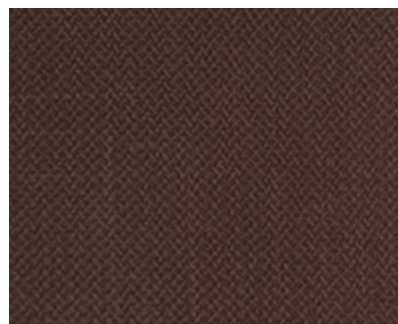


W3E03/H

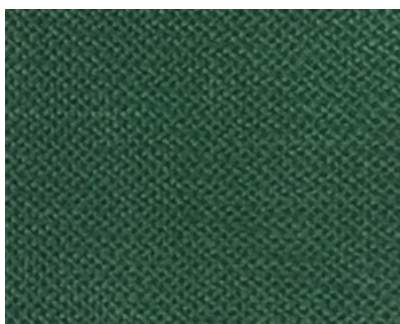


W3E04/H




W3E21/H

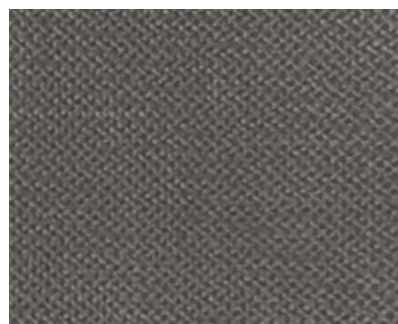


W3E57/H

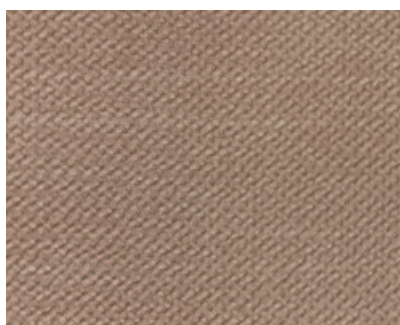


W3E12/H

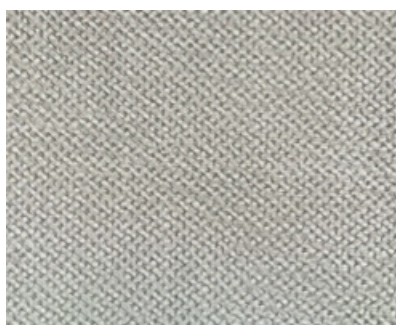


W3E13/H

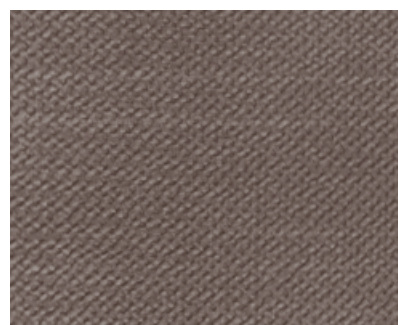


W3E58/H

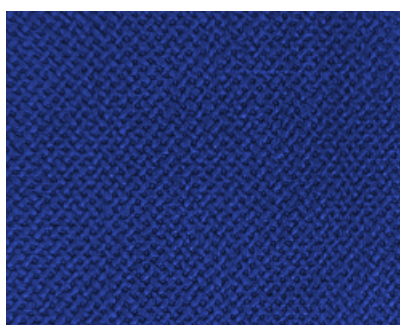


W3E15/H

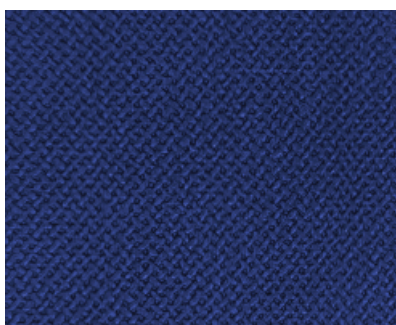


W3E06/H

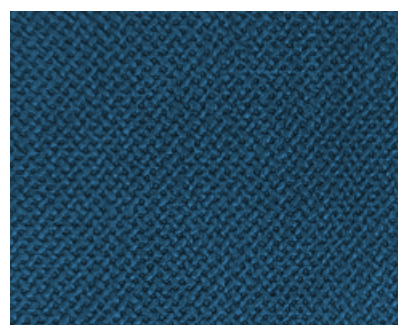


W3E56/H

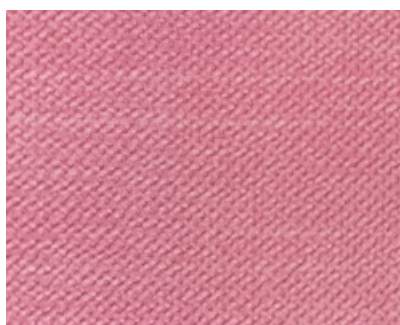

W3E22/H

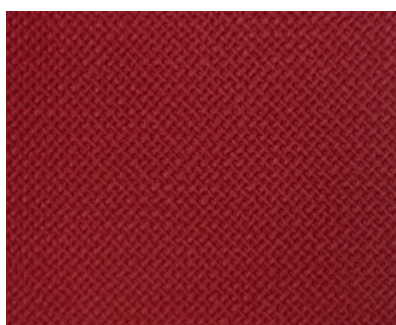

W3E09/H

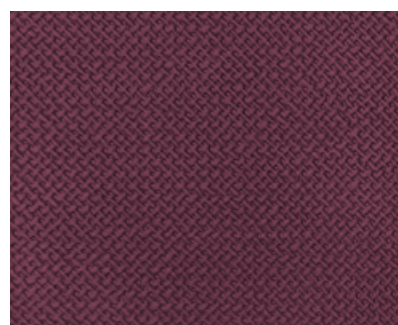

W3E05/H


特殊色起订量500米。

The MOQ of special color is 500 meters.


W3E/H *series*

STANDARD SIZE : 1400mm×50M/R


SAMPLE SIZE : 700mm×500mm

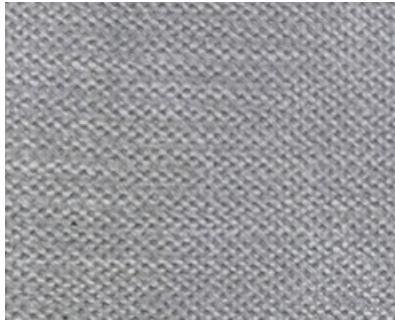


W3E10/H

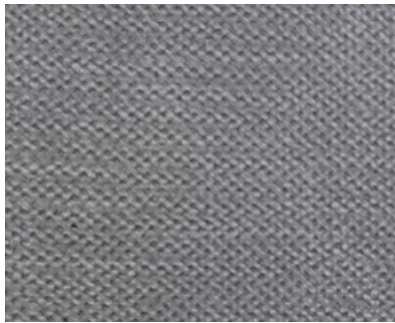


W3E11/H

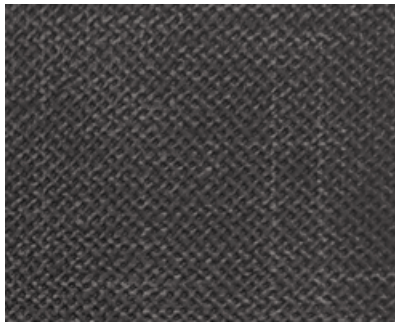


W3E01/H

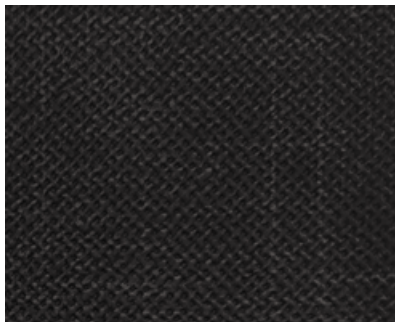

W3E07/H

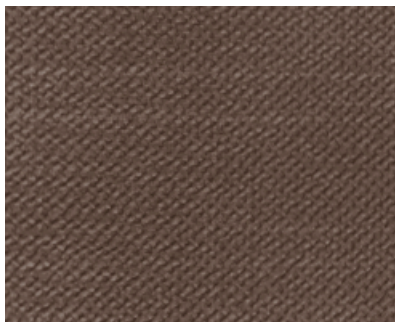

W3E28/H

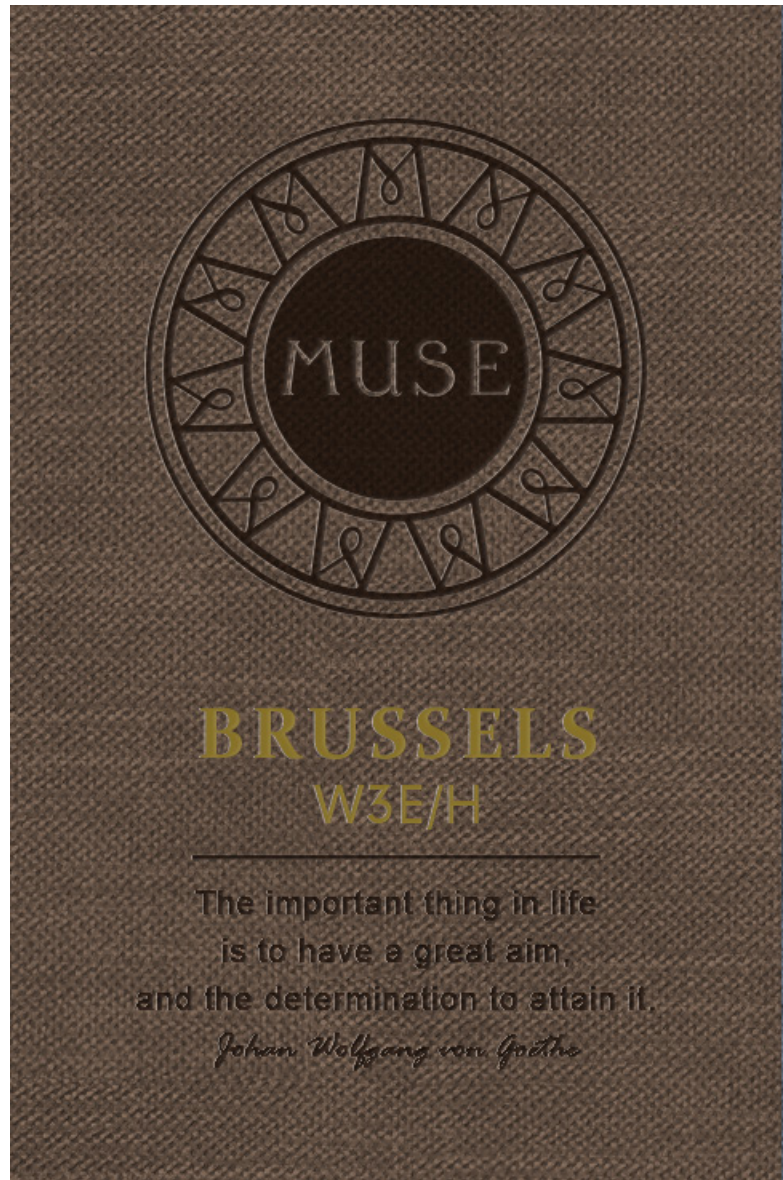

产品可能产生行业标准允许范围内色差, 请勿将不同批次产品混用。

Different production lots may have color variation within the allowable range of industry standards and different lots should not be mixed for one production.

BRUSSELS

W3E/H series

MUSE

繆斯变色革 THERMO PU



DATA SHEET

厚度Thickness	0.65±0.05mm
宽度Width	≥1400mm
长度(常规卷)Roll length	50M
热压温度Burnishing	320-360 °F/ 160-180 °C
烫金温度Foil Stamping	230-250 °F/ 110-120 °C

ACTIVA

Alliance for Creating Technology of Innovative Value
www.activapu.com